



3MP HD TVI Vandal Dome WDR Camera



Key Features

- 3 Megapixel high-performance CMOS
- Analog HD output, up to 3MP resolution
- True Day/Night
- OSD menu, DNR, Smart IR
- True WDR, up to 120dB
- 3 EX IR
- EXIR technology, up to 20m IR distance
- IP66 weatherproof & vandal proof
- Up the Coax

Dimensions

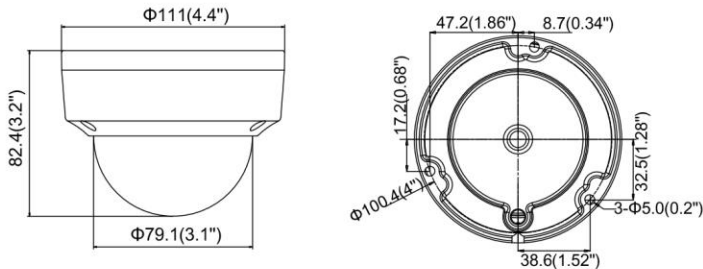

Unit: mm

Specifications

Model	AC335-OD-2.8	AC335-OD-3.6
Camera		
Image Sensor	3MP CMOS Image Sensor	
Effective Pixels	2052(H)*1536(V)	
Min. illumination	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR	
Shutter Time	1/25(1/30)s to 1/50,000s	
Lens	2.8mm Fixed Lens	3.6mm Fixed Lens
Angle of View:	103.5°	80.9°
Lens Mount	M12	
Day & Night	ICR	
Angle Adjustment	Pan: 0° - 340°; Tilt:0° - 75°; Rotate: 0° - 355°	
Synchronization	Internal Synchronization	
WDR	120dB	
Video Frame Rate	1920×1536@18fps	
HD Video Output	1 Analog HD output	
S/N Ratio	> 62dB	
Menu		
AGC	Support	
D/N Mode	Color/BW/SMART	
White Balance	ATW/ MWB	
BLC	Support	
Functions	Wide Dynamic Range, Digital noise reduction, Mirror, SMART IR	
General		
Operating Conditions	-40 °C – 60 °C (-40 °F – 140 °F), Humidity 90% or less (non-condensing)	
Power Supply	12V DC ± 15%	
Power Consumption	Max. 5W	
Protection Level	IP66	
IR Range	Up to 20m	
Impact Protection	IK10	
Communication	Up the coax, Protocol: HIKVISION-C (TVI output)	
Dimensions	φ111mm×82.5mm (φ4.37"×3.25")	
Weight	Approx. 350g (0.77lb)	