


# ED8208TEP / ED8216TEP

## 4MP 4-IN-1 Cuatro DVRs Titanium GUI

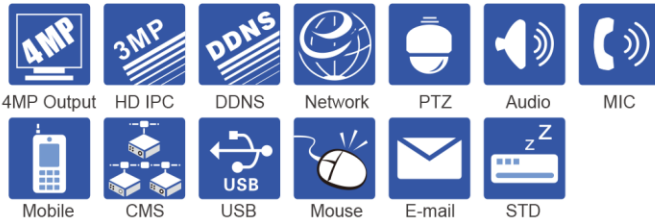

### Introduction:


ED8208TEP / ED8216TEP are 8 / 16 CH 4MP high definition DVRs with ability to connect analog and IP cameras simultaneously, which adopt the standard H.264 high profile compression format and the most advanced SOC technique to ensure real time recording in each channel and realize outstanding robustness of the system.

ED8208TEP & ED8216TEP support 8 / 16 CH video input, 4 / 4 CH audio input, simultaneous 8 / 16 CH playback. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.

### Main Feature:

- 8 / 16 CH TVI / AHD video input
- 8 / 16 CH 4MP / 3MP / 1080P / 720P / WD1 recording
- 4 / 4 CH IPC 3MP / 1080P / 960P / 720P recording
- Adopt standard H.264 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphics User Interface ( GUI ), window style operation by mouse
- Multi-mode recording: manual / timer / motion / sensor
- Playback : 8 / 16 CH simultaneously playback
- Search: time slice, time, event ( manual, sensor, motion ), tag search
- Express and flexible backup via USB, network and so on Pentaplex: preview, record, playback, backup and remote access DHCP, DDNS, PPPoE network protocol, IE browse and CMS supported Remote control via IE or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device Multi-user online simultaneously
- Authorization management, log review and device status review
- HDMI 4K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises Support NAT function and QRCode scanning by mobile phone and PAD Powerful smart phone & Pad surveillance with iOS and Android OS

### Physical Interfaces:

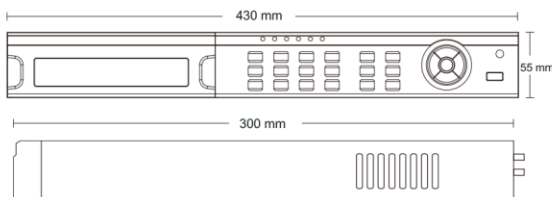

Model	ED8208TEP	ED8216TEP	
System	Compression	Standard H.264 High Profile	
	CPU	Cortex A9	
	OS	Embedded Linux	
Video	Input	BNC × 8	BNC × 16
	Resolution	TVI : 4MP@15fps, 3MP@18fps, 1080P, 720P, WD1 real time; AHD : 1080P, 720P, WD1 real time	
	IP Input / Access Bandwidth	IPC × 4 / 24Mbps	IPC × 4 / 24Mbps
	Output	HDMI × 1 : 4K × 2K, VGA × 1 : 1920 × 1080, BNC × 1 : CVBS ( used as the main or spot output )	
Audio	Input	RCA × 4	
	Output	RCA × 1	
	Two-way audio	Take up channel one audio input	
Record	Resolution	4MP, 3MP, 1080P, 720P, WD1	
	Frame Rate	4MP : 15 fps ( PAL / NTSC ) 3MP : 18 fps ( PAL / NTSC ) 1080P / 720P / WD1 : 25 fps ( PAL ) / 30 fps ( NTSC )	
	Bit Rate	768Kbps ~ 8Mbps	
	Mode	Manual, timer, motion, sensor	
IP Input	Resolution	3MP / 1080P / 960P / 720P	
	Frame Rate	25fps ( PAL ) / 30fps ( NTSC )	
Play back	Playback	8 CH	16 CH
	Search	Time slice / time / event / tag search	
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events	
	Function	Play, pause, FF, FB, digital zoom, etc.	
Alarm	Mode	Manual, sensor, motion, exception	
	Input	4	
	Output	1	
Network	Triggering	Record, snap, preset, e-mail, etc.	
	Interface	RJ45 10 / 100Mbps × 1	RJ45 10/100/1000Mbps × 1
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP	
Mobile	Web Client	Multiple users online	
	OS	iOS, Android	
Storage	HDD	SATA × 2, max 6T per HDD	
Backup	Local Backup	U disk, USB mobile HDD	
	Network Backup	Yes	
Port	RS485	RS485 × 1, connect to PTZ or keyboard	
	USB	USB 2.0 × 1 ( front panel ), USB 3.0 × 1 ( rear panel )	
	Remote Controller	Yes	
Others	Power Supply	DC 12V	
	Consumption	≤ 15W ( without HDD )	≤ 18W ( without HDD )
	Dimensions	430 × 300 × 55 ( W × D × H ) ( mm )	
	Work Environment	-10 ~ 50 °C · 10% ~ 90% humidity	