


# ED9532H5NV

## H.265 5Mp NVR

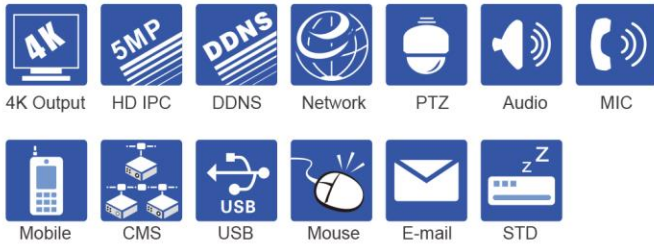


### Introduction:

ED9532H5NV is 32 CH 5MP / 4MP / 3MP / 1080P / 960P / 720P high definition NVRs, which adopt the most advanced SOC technique to ensure high definition recording in each channel and realize outstanding robustness of the system. ED9532H5NV supports 32 CH IP input, simultaneous 16 CH playback, and 4K high definition display. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.

### Main Feature:

- \* Supports 32 CH 5MP / 4MP / 3MP / 1080P / 960P / 720P IP input
- \* Adopts standard H.265 and H.264 high profile compression format to get high-quality video at much lower bit rate
- \* Intuitive and user-friendly Graphic User Interface ( GUI ), Windows style operation by mouse
- \* Multi-mode recording: manual / timer / motion / sensor
- \* Playback : 16 CH simultaneous playback
- \* Search : time slice, time, event ( manual, sensor, motion ), tag search
- \* Express and flexible backup via USB, network and so on
- \* Pentaplex : preview, record, playback, backup and remote access
- \* DHCP, DDNS, PPPoE network protocol and CMS supported
- \* Remote control via IE or CMS : preview, playback, backup, PTZ and configuration
- \* Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- \* Multi-user online simultaneously
- \* Authorization management, log view and device status view
- \* 4K output, true high resolution display
- \* Supports PTZ preset and auto cruise, up to 255 presets and 8 cruises
- \* Supports NAT function and QRCode scanning by mobile phone and PAD
- \* Powerful smart phone & Pad surveillance with iOS and Android OS

### Physical Interfaces:

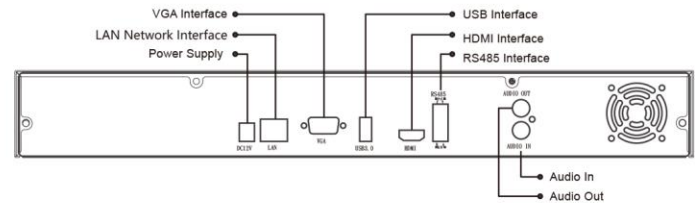

System	Compression	Standard H.265 / H.264
	OS	Embedded Linux
Video	Network Input	32 CH IPC input
	Network Bandwidth	256Mbps
	Network Format	5MP / 4MP / 3MP / 1080P / 960P / 720P@25 / 30fps
Audio	Output	HDMI x 1 : 4K x 2K / 1920 x 1080 / 1280 x 1024, VGA x 1 : 1920 x 1080 / 1280 x 1024
	Network Input	32 CH IPC audio input
	2-way Audio	RCA x 1
Record	Local Output	RCA x 1
	Record Stream	Dual stream recording
	Resolution	5MP / 4MP / 3MP / 1080P / 960P / 720P
Playback	Mode	Manual, timer, motion, sensor
	Playback	Max 16 CH
	Search	Time slice / time / event / tag search
Alarm	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
	Function	Play, pause, FF, FB, digital zoom, etc.
	Mode	Manual, sensor, motion, exception
Network	Input	Support IPC alarm input
	Output	Support IPC alarm output
	Triggering	Record, snap, preset, e-mail, etc.
Mobile Device	Interface	RJ45 10 / 100 / 1000 Mbps x 1
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
	Web Client	Max 10 users online
Storage	OS	iOS, Android
	HDD	SATA x 2, max 6T per HDD
Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes
Port	USB	USB 2.0 x 1 ( front panel ), USB 3.0 x 1 ( rear panel )
	Power Supply	DC 12V
Others	Consumption	≤ 15W ( without HDD )
	Dimensions (mm)	430 x 300 x 55 ( W x D x H )
	Work Environment	-10 ~ 50 °C · 10% ~ 90% humidity