



## H.265 3Mp Network Bullet StarLight Camera

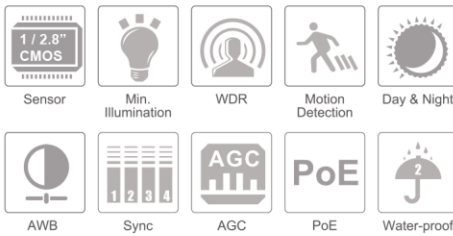

### Key Features

- 1/2.8" Progressive Scan CMOS
- H.265 Compression
- WDR, 2D/3D DNR
- IR Distance: 20 ~ 30m
- 1 Way Audio
- 42IR
- 3.6mm Fixed Lens
- 12V DC / PoE

### Dimensions

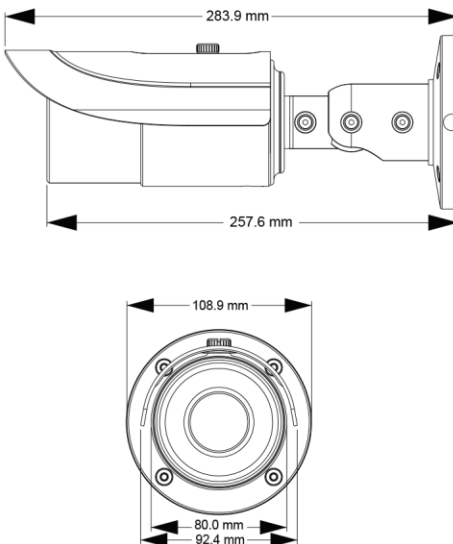

### Specifications

Model	IP-5IR3M42-3.6	
Camera	Image Sensor	1 / 2.8" CMOS
	Effective Pixels	2048 x 1536
	Electronic Shutter	1/25s~ 1/100000s
	Min. Illumination	color:0.0lux@F1.2,AGC ON B/W:0lux with IR
	Lens	3.6mm Fixed Lens
	Lens Angle	horizontal:50° · 78.5°-30° (-FZ)
	Lens Mount	M12 Mount · Φ14 Mount (-FZ)
	WDR	WDR
Image	BLC	Yes
	DNR	2D/3D DNR
	Video Compression	H.265 MP, H.264 BL/MP/HP, MJPEG
	Audio Compression	G.711A/G.711U
	Bit-rate	16Kbps ~ 10Mbps
	Encode Mode	VBR/CBR
	Image Quality	Five Levels under VBR; Freely adjustable under CBR
	Resolution	3MP (2048*1536) , 1080P (1920*1080) , 720P (1280*720) , VGA (640*480)
Port	Multi-Stream	3MP (1~30fps) / VGA (1~30fps) / 1080P (1~30fps) / 720P (1~30fps) / VGA (1~30fps)
	Image Setting	ROI, Saturation, Brightness, Hue, Contrast, WDR, Sharpness, DNR, etc
	Network	RJ45
	Video output	CVBS (BNC × 1)
	Audio	one-way audio (MIC IN × 1)
	Card Storage	NO
	RS485	NO
	Alarm Input	NO
Functions	Alarm Output	NO
	Remote Monitoring	Browser, CMS , mobile app
	Supported Browsers	IE/Chrome/Firefox/Safari
	Online Connection	10 online users
	Protocol	TCP/IP , UDP, DHCP, NTP, RTSP, PPPOE, DDNS, SMTP, FTP
	connection Protocol	ONVIF
	Storage	network remote storage
	Smart Alarm	Motion Alarm
Others	Intelligent Analysis	PEA/OSC/AVD
	Day&Night	ICR
	IR Distance	20~30m
	IR LED - count	42 (Φ5 12mil)
	Water-proof	IP66
	Angle Adjustment	any angle
	Power supply	DC 12V/PoE
	Power Consumption	< 2.5W (IR Off) , < 6W (IR On)
Working Environment	-20°C ~ 50°C , 10% ~ 90% humidity	
Dimension	Φ87mm×219mm	
weight	≈609g	