


## H.265 4Mp Network IR Bullet Camera


### Specifications

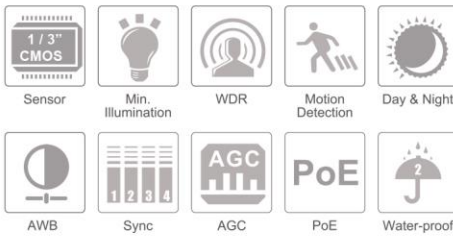

### Key Features

- 4MP ( 2688 × 1520 ) H.265 full real time coding
- Max. resolution: 2688 × 1520
- ICR auto switch, true day / night
- 20 ~ 30m IR night view distance
- Third generation of dot matrix LED IR lights, small size, efficient heat dissipation, long lifespan
- 3D DNR, physical WDR
- Support HLC, BLC and defogging
- Support electrical zoom
- ROI coding
- Support local CVBS video output and one-way audio
- Support PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P
- IP66 ingress protection
- Support three streams

### Dimensions

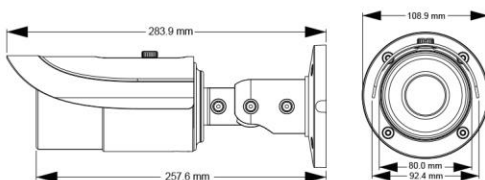

Specification	IP-5IR4042-3.6	IP-5IR4042-2.8	
Camera	Image Sensor	1 / 3 "CMOS	
	Effective Pixels	2688 x 1520	
	Electronic Shutter	1/25s~ 1/100000s	
	Min. Illumination	color:0.05lux@F1.2,AGC ON B/W:0lux with IR	
	Lens	3.6mm Fixed Lens	2.8mm Fixed Lens
	Lens Angle	horizontal:50°	
	Lens Mount	M12 Mount	
	WDR	WDR	
	BLC	Yes	
	DNR	2D/3D DNR	
Image	Video Compression	H.265 MP 、 H.264 BL/MP/HP 、 MJPEG	
	Audio Compression	G.711A/G.711U	
	Bit Rate	64Kbps ~ 10Mbps	
	Encode Mode	VBR/CBR	
	Image Quality	Five Levels under VBR ; Freely adjustable under CBR	
	Resolution	4MP (2560x1440), 3MP (2304x1296), 1080P (1920x1080), 720P (1280x720), D1, CIF, 480x240	
	Multi-Stream	4MP (1~30fps) / 3MP (1~30fps) / 1920x1080 (1~30fps) / 720P (1~30fps) / D1 (1~30fps) / CIF (1~30fps)	
Image Setting	ROI, Saturation, Brightness, Hue, Contrast, WDR, Sharpness, DNR, etc		
Port	Network	RJ45	
	Video Output	CVBS (BNC × 1)	
	Audio	one-way audio (MIC IN × 1)	
	card storage	NO	
	RS485	NO	
	Alarm Input	NO	
	Alarm Output	NO	
Functions	Remote Monitoring	Browser, CMS , mobile app	
	Supported Browsers	IE/Chrome/Firefox/Safari	
	Online Connection	10 online users	
	Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPOE, DDNS, SMTP, FTP	
	connection Protocol	ONVIF	
	Storage	network remote storage	
	Smart Alarm	Motion Alarm	
	Intelligent Analysis	PEA/OSC/AVD	
	Day & Night	ICR	
	IR Distance	20~30m	
	IR LED - count	42 (Φ5 12mil)	
Water-proof	IP66		
Others	Angle Adjustment	any angle	
	Power Supply	DC 12V/PoE	
	Power Consumption	< 2.5W (IR Off), < 6W (IR On)	
	Working Environment	-20℃ ~ 50℃ · 10% ~ 90% humidity	
	Dimension & Weight	Φ87mm×219mm, ≈609g	