



H.265 3Mp Network Small IR Dome Camera

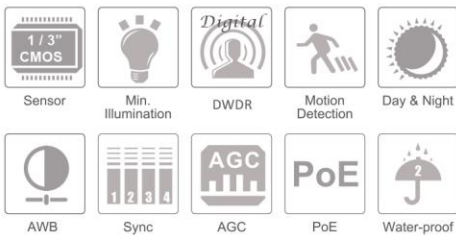

Key Features

- 1/3" Progressive Scan CMOS
- H.265 Compression
- DWDR, 2D/3D DNR
- IR Distance: 10 ~ 20m
- Mic In, CVBS
- 2 Matrix IR
- 3.6mm Fixed Lens
- 12V DC / PoE

Dimensions

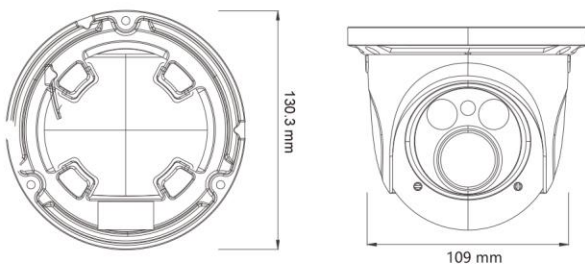

Model	IP-5IRD3002-3.6
Camera	
Image Sensor	1 / 3 "CMOS
Effective Pixels	2304 x 1296
Electronic Shutter	1/25s~ 1/100000s
Min. Illumination	Color:0.05lux@F1.2,AGC ON B/W:0lux with IR
Lens	3.6mm Fixed Lens
Lens Angle	Horizontal: 50°
WDR	DWDR
BLC	Yes
DNR	2D/3D DNR
Image	
Video Compression	H.265 MP, H.264 BL/MP/HP, MJPEG
Audio Compression	G.711A/G.711U
Bit-rate	64Kbps ~ 10Mbps
Encode Mode	VBR/CBR
Image Quality	Five Levels under VBR Freely adjustable under CBR
Resolution	3MP (2304×1296) , 1080P (1920×1080) , 720P (1280×720) , D1, CIF, 480x240
Video Frame Rate	3MP (1~30fps) / 1920x1080 (1~30fps) / 720P (1~30fps) 720P (1~30fps) / D1 (1~30fps) / CIF (1~30fps) D1 (1~30fps) / 480x240 (1~30fps) / CIF (1~30fps)
Image Setting	ROI, Saturation, Brightness, Hue, Contrast, WDR, Sharpness, DNR, etc
Port	
Network	RJ45
Video output	CVBS (BNC × 1)
Audio	one-way audio (MIC IN × 1)
card storage	N/A
RS485	N/A
Alarm In / Out	N/A
Function	
Remote Monitoring	Browser, CMS ,mobile app
Supported Browsers	IE / Chrome / Firefox / Safari
Online Connection	10 online users
Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPOE, DDNS, SMTP, FTP
connection Protocol	ONVIF
Storage	network remote storage
Smart Alarm	Motion Alarm
Intelligent Analysis	PEA/OSC/AVD
Day&Night	ICR
IR Distance	20~30m
IR LED - count	2 (array led 28mil)
Water-proof	IP66
Others	
Angle Adjustment	horizontal:0°~360°, vertical: 0°~90°, rotation: 0°~360°
Power Supply	DC 12V/PoE
Power Consumption	< 2.5W (IR Off) / < 5W (IR On)
Working Environment	-20 °C ~ 50°C , 10% ~ 90% Humidity
Dimension & Weight	Φ109mm×130mm / ≈ 689g