



## H.265 3Mp Network Mini Vandal Camera

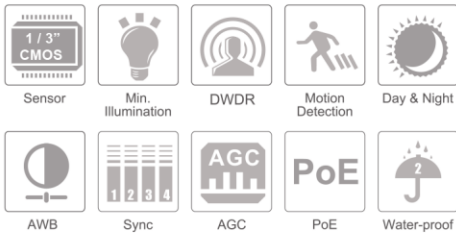

### Key Features

- 3MP ( 2048 x 1536 ) full real time coding
- Max. resolution: 2048 x 1536
- ICR auto switch, true day / night
- 10 ~ 20m IR night view distance
- 3D DNR, digital WDR
- ROI coding
- Supports local CVBS video output and one-way audio
- Supports PoE power supply
- Supports smart phone, iPad, remote monitoring
- Supports P2P
- Supports three streams
- IP66, IK10

### Dimensions

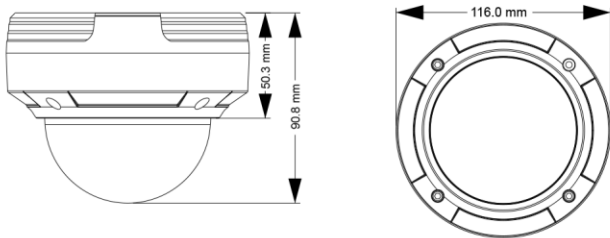

Model	IP-5VP3030-3.6MM
<b>Camera</b>	
Image Sensor	1 / 3" 3MP CMOS
Image Size	2048 x 1536
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Min. Illumination	0.05 lux @F1.2,AGC ON; 0 lux with IR
Lens	3.6mm Fixed Lens
Angle Adjustment	Any angle
WDR	DWDR
<b>Image</b>	
Video Compression	H.265 / H.264 / MJPEG
Resolution	3MP ( 2048 x 1536 ), 1080P ( 1920x1080 ), 720P ( 1280x720 ), D1, CIF, 480x240
Main Stream	60Hz : 3MP( 1 ~ 30fps ) / 1080P( 1 ~ 30fps ) / 720P( 1 ~ 30fps ) 50Hz : 4MP( 1 ~ 25fps ) / 3MP( 1 ~ 25fps ) / 1080P( 1 ~ 25fps ) / 720P( 1 ~ 25fps )
Bit Rate	64 Kbps ~ 8Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
<b>Interfaces</b>	
Network	RJ45
Audio	MIC IN x 1
Video Output	CVBS video output ( BNC x 1 )
<b>Functions</b>	
Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi stream real time transmission
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Storage	Network remote storage
Smart Alarm	Motion Alarm
Day & Night	ICR
PoE	Yes
IR Distance	10 ~ 20 m
Water-proof	IP66, IK10
<b>Others</b>	
Power Supply	DC 12V / PoE
Power Consumption	< 4W
IR Consumption ON	< 5.5W
Operating Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions ( mm )	Φ 116 x 91mm
Weight ( net )	381g
Installation	Wall mounting, pendent mounting