


## H.265 3Mp Network Vandal StarLight Camera

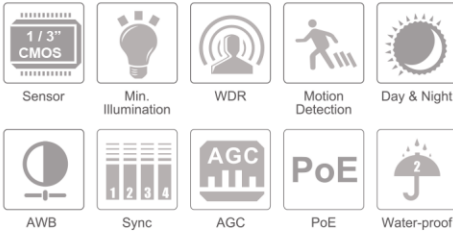

### Key Features

- 1/3" Progressive Scan CMOS
- H.265 Compression
- WDR, 2D/3D DNR
- IR Distance: 20 ~ 30m
- 2 Way Audio
- 1CH Alarm In / 1CH Alarm Out
- 30IR
- 2.8~12mm **Motorized** Lens
- microSD
- 12V DC / PoE

### Specifications

Model	IP-5VP4032MZ	
Camera	Image Sensor	1 / 3" CMOS
	Effective Pixels	2688*1520
	Electronic Shutter	1/25s~ 1/10000s
	Min. Illumination	color:0.05lux@F1.2,AGC ON B/W:0lux with IR
	Lens	2.8 ~ 12mm Motorized Lens
	Lens Angle	80°~38°
	Lens Mount	Φ14 Mount
Image	WDR	DWDR
	BLC	Yes
	DNR	2D/3D DNR
	Video Compression	H.265 MP、H.264 BL/MP/HP、MJPEG
	Audio Compression	G.711A/G.711U
	Bit Rate	64Kbps ~ 10Mbps
	Encode Mode	VBR/CBR
Image	Image Quality	Five Levels under VBR ; Freely adjustable under CBR
	Resolution	4MP (2560x1440), 3MP (2304x1296), 1080P (1920x1080), 720P (1280x720), D1, CIF, 480x240
	Multi-Stream	4MP (1~30fps) / 3MP (1~30fps) / 1920x1080 (1~30fps) / 720P (1~30fps) / D1 (1~30fps) / CIF (1~30fps)
	Image Setting	ROI, Saturation, Brightness, Hue, Contrast, WDR, Sharpness, DNR, etc
	Port	Network
Video Output		CVBS(BNC × 1)
Audio		two-way audio ( MIC IN × 1, MIC OUT × 1 )
card storage		TF card, Up to 64GB
RS485		× 1
Alarm Input		× 1
Alarm Output		× 1
Function	Remote Monitoring	Browser, CMS, mobile app
	Supported Browsers	IE/Chrome/Firefox/Safari
	Online Connection	10 online users
	Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPOE, DDNS, SMTP, FTP
	connection Protocol	ONVIF
	Storage	local storage(TF Card), network remote storage
	Smart Alarm	Motion Alarm, Sensor Alarm
	Intelligent Analysis	PEA/OSC/AVD
	Day & Night	ICR
	IR Distance	20~30m
Others	IR LED - count	30(Φ5 12mil)
	Water-proof	IP66
	Angle Adjustment	horizontal:0°~77° , vertical : 0°~360° , rotation : 0°~360°
	Power Supply	DC 12V/PoE
	Power Consumption	< 2.5W (IR Off), < 5W (IR On)
Working Environment	-20℃ ~ 50℃ , 10% ~ 90% humidity	
Dimension & Weight	Φ150mm×114mm, ≈ 1260g	