



3Mp Network Eyeball Dome Camera

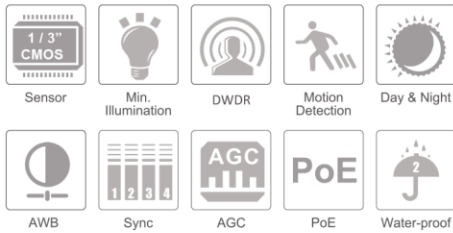

Key Features

- 3MP (2048 x 1536) coding
- Max resolution: 2048 x 1536
- ICR auto switch, true day / night
- 10 ~ 20m IR night view distance
- 3D DNR, digital WDR
- ROI coding
- PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P
- IP66 ingress protection

Dimensions

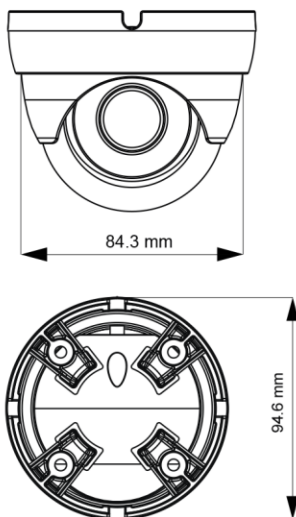

Design and specifications are subject to change without notice.

Specifications

Model	IP-IRD3S02-W
Camera	
Image Sensor	1/3" CMOS
Image Size	2048 x 1536
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Auto Iris	Fixed Iris
Min. Illumination	0.07 lux @F1.2,AGC ON; 0 lux with IR
Lens	3.6 mm @ F2.0, angle of view: 70° (2.8 mm optional)
Lens Mount	M12
Day & Night	ICR
Wide Dynamic Range	Digital WDR
Digital NR	3D DNR
Angle Adjustment	Any angle
Image	
Video Compression	H.264 / MJPEG
H.264 Standard	Baseline Profile / Main Profile / High Profile
Resolution	3MP (2048 x 1536), 1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, 480 x 240
Main Stream	60Hz : 3MP (1 ~ 30fps) / 1080P (1 ~ 30fps) / 720P (1 ~ 30fps)
Bit Rate	128 Kbps ~ 6 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI	3 ROI
Interfaces	
Network	RJ45
Functions	
Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 4 users ; Support multi-stream real time transmission
Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Interface Protocol	ONVIF
Storage	Network remote storage
Smart Alarm	Motion alarm
IR LED	2 Matrix IR
IR Distance	10 ~ 20 m
Water-proof	IP66
Others	
Power Supply	DC 12V / PoE
Power Consumption	< 2W
IR Consumption ON	< 4.5W
Environment	- 20°C ~ 50°C, 10% ~ 90% humidity
Dimensions (mm)	Φ84.3 × 94.6
Weight (net)	428g