


8CH PoE NVR




Key Features

- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- HDD quota and group management
- 8 independent PoE network interfaces are provided

Dimensions

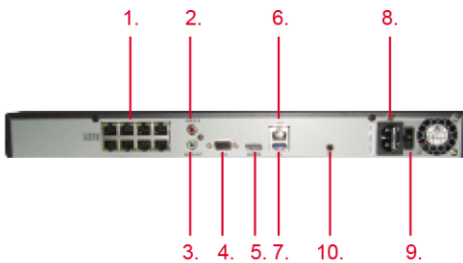

1. Network Interfaces with PoE function
2. Audio In
3. Audio Out
4. VGA Output
5. HDMI Interface
6. LAN Network Interface
7. USB Interface
8. Power Input
9. Power Switch
10. GND

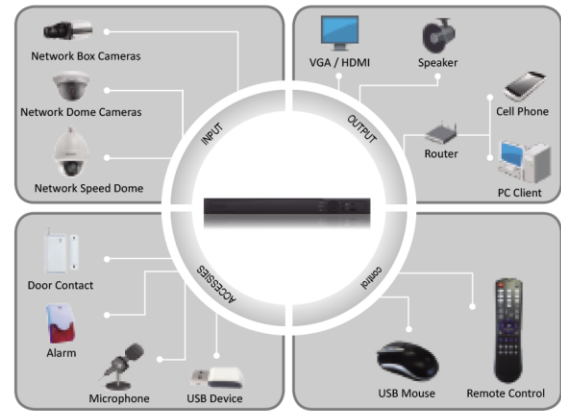

Model		NR31P8-8
Video/Audio input		
IP video input		8CH
Two-way audio input		1CH, RCA (2.0 Vp-p, 1kQ)
Network		
Incoming Bandwidth		80Mbps
Outgoing Bandwidth		80Mbps
Remote Connection		128
Video/Audio output		
Recording resolution		5MP / 3MP / 1080p / UXGA / 720p / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF
Frame Rate	Main stream	50 fps (P) / 60 fps (N)
	Sub-stream	50 fps (P) / 60 fps (N)
HDMI/VGA output		1CH, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz
Decoding		
Live view / Playback resolution		5MP / 3MP / 1080p / UXGA / 720p / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF
Capability		8CH@720P, 6CH@1080P
Hard disk		
SATA		2 SATA interface for 2 HDDs
Capacity		Up to 4TB for each disk
External interface		
Network interface		1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface
USB interface		1 × USB 2.0 and 1 × USB 3.0
PoE		
Interface		8 independent 100 Mbps PoE network interfaces
Max. Power		120W
Supported standard		AF and AT
Others		
Power supply		220V AC
Consumption (no HDD)		≤ 10W
Working temperature		-10 °C ~ +55 °C (+14 °F ~ + 131 °F)
Working humidity		10 % ~ 90 %
Chassis		19-inch rack-mounted 1U chassis
Dimensions (W × D ×H)		445 × 290 × 45mm (17.5 ×11.4 × 1.8 inch)
Weight (no HDD)		≤ 1 Kg (2.2 lb)